

# APLINK UV Series

## High Resolution UV Curing Coding System


High resolution Inkjet printing system APLINK UV Series developed for secondary packing codification upon all type of surfaces.

Designed to print text, images and high quality barcodes fulfilling GS1 International coding regulation, the powerful APLINK UV Series provides high resolution codification upon any type of secondary packing such as corrugated carton boxes, glossy boxes, and even plastic in real time and right in the same production line.

Within 180 dpi or 360 dpi print resolution, up to 30 meters per minute of printing speed and a maximum print length of 3 meters, outstands its easy integration and adaptability into any production line due to its capability to print in both sense directions (left-right/ right-left) optimal dimensions, printing features and advanced modularity.

**Interface:** all APLINK UV Series product range incorporates a powerful interface (WYSIWYG), 5,7" touch screen display providing an intuitive and graphic environment which allows to preview all the stored formats/messages while the equipment keeps running.

**OBCS:** advanced curing system fully integrated into the print head, providing an exceptional printing quality upon all type of substrates (corrugated carton box, glossy boxes, plastic, etc.)

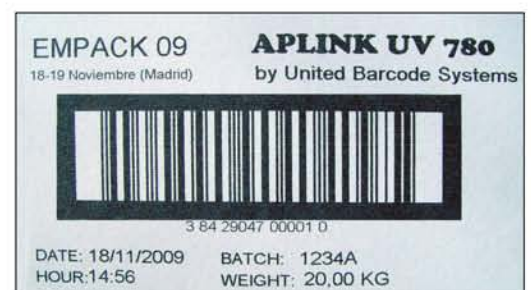

**UBS**

United **Barcode Systems**

# APLINK UV Series Specifications

## TECHNICAL SPECIFICATIONS

|                     |  |
|---------------------|--|
| GENERAL DESCRIPTION | High Resolution Inkjet Printing System   |
| POWER SUPPLY        | 110 / 220 V 50-60 Hz.                    |
| HEIGHT              | Min. 515 mm. / Max. 1290 mm.             |
| TEMPERATURE         | from + 10 °C (50 °F) to + 50 °C (122 °F) |
| HUMIDITY            | from 5% to 85% non condensed             |


## CONSUMABLE

|                    |   |
|--------------------|---|
| INKS               | Ultra Violet                                      |
| COLOURS            | Black, Red, Blue and Yellow. Other under request. |
| PACKING            | 1 lt. Ink Bottle                                  |
| PRINTING MATERIALS | All surfaces in secondary packing                 |


## PRINTING FEATURES

|                   |   |
|-------------------|---|
| PRINTING HEIGHT   | 70 mm.  |
| RESOLUTION        | 180 dpi / 360 dpi. According to printed surface.  |
| PRINTING SPEED    | Up to 30 meters /minute.  |
| BARCODES          | DUN 14, EAN-8, EAN-13, EAN 128, CODE 19, CODE 1238, 2/5 INDUSTRIAL, 2/5 INTERLEAVED, DATAMATRIX |
| FIXED OR VARIABLE | Formulas, counters , dates, free-fields Windows TM and Truetype TM fonts.                       |
| GRAPHICS          | Logos, images and graphics.   |
| OPTIONS           | Special heights encoder support, 90 ° printhead positioning, box line positioning.              |
| INTERFACE         | TFT digital touchscreen display 5,7 " colour.   |


## APLINK CONNECTIVITY



**USB**



**Standalone**

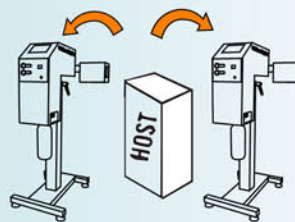

**Ethernet/TCPIP**



**Wi Fi**



## Tigerpak Industrial Supplies Ltd.

1655 Sismet Rd., Unit 31  
 Mississauga, ON L4W 1Z4  
 Phone: 416-836-8296 Fax: 905-290-6784  
 www.tigerpak.ca sales@tigerpak.ca service@tigerpak.ca

## Labeling, Coding and Marking Solutions United Barcode Systems

|                   |                    |                        |
|-------------------|--------------------|------------------------|
| UBS HEADQUARTERS  | (+34) 902 127 721  | info@ubscore.com       |
| UBS NORTH AMERICA | (+1) 407 590 4661  | info@ubscore.com       |
| UBS SPAIN         | (+34) 902 195 591  | info@ubscore.com       |
| UBS ITALY         | (+39) 0224 972 132 | info.italy@ubscore.com |
| UBS MÉXICO        | (+52) 55 5572 4892 | infomexico@ubscore.com |

[www.ubscore.com](http://www.ubscore.com)

