



# Inter Mac RED DOD

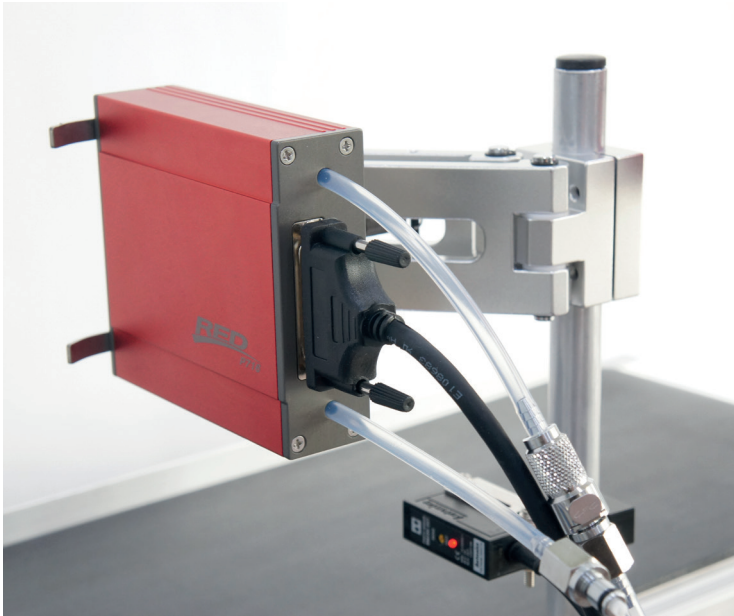

**interMAC**

## DOD large character printer

RED DOD Large character Inkjet Marking System has a robust structure that is built to work in nearly any environment. With its compact size, RED DOD is easy to install and maintain. The uniquely small and lightweight solenoid in its printhead contributes to efficiency that delivers a remarkably fast print speed of up to 175m/min. Depending on your production requirements, RED DOD can be configured to print with solvent based inks or water based inks, and printheads are available in print sizes ranging from 14mm (water based) to 130mm (solvent based). Other features, such as ink validation technology to protect against accidental use of incompatible supplies, and a large 7" Windows based touch screen controller make RED DOD an excellent choice for Large Character DOD printing tasks.



## Technical Specifications

PRINT SPECIFICATIONS	
Print Speed	MEK "P" Type: Max. 175m/min WATER "C" Type: Max. 125m/min
Print Height	MEK 7nozzles: Max. 26mm 16nozzles: Max. 63mm 32nozzles: Max. 130mm WATER 7nozzles: Max. 14 or 24mm WATER 16nozzles: Max. 33 or 60mm WATER 32nozzles: Max. 68 or 124mm
Font Reduce	Adjustable with the tilt bracket
Storage Capacity	1 000 messages
Message	Text, Barcode, Image, Auto Date/Time, Counter, Shift
Barcode	DataMatrix, CODE128, CODE39, CODE93, CODE2OF5, EAN13, UPCA, UPCE
Standard Alarms	End of Roll /Web Break / Drive Open
Font type	Gulim, Arial . Importing an external font
Wave Utility Bracket	Printing on uneven surface such as PP bag

PRODUCT SPECIFICATIONS	
Display	7" (800x480mm) Color LCD Touch Screen
Power	AC90V–240V / 50–60Hz
Ink Refill	Safety In Refill with NFC Tag
Connection Port	Photo Sensor, Warning Light, BCD, RS232, Encoder, USB
Backup/Recovery	USB
Nozzle Pitch	MEK: 4.2mm / WATER: 2.2 or 4.0mm
Custom – made Design	Available for special environments
Language	English, Chinese, Korean, Japanese, Vietnamese, Italian, Turkish, Spanish, Arabic, Persian, Portuguese, Lithuanian, German, French, Russian, Dutch, Indonesian, Hindi, Malaysia, Bangla, Thai, Rumanian
Operating Temperature	5-45°C
Certificate	CE, FCC



For more information, contact Tigerpak Industrial Supplies,  
6810 Kitimat Rd, Unit 1, Mississauga, Ontario, L5N 5M2, Canada.

**Telephone:**  
Ontario (289) 328-0651, (877) 538-8078  
Quebec (514) 587-2607, (855) 296-4372

**E-mail:** Sales@Tigerpak.ca Info@Tigerpak.ca  
**Website:** www.tigerpak.ca

